

# AURAS

Submersible Pumps for Toughest Conditions.

# CLEVERLINE

high-quality · versatile · efficient

NEW AT  
**AURAS**



# CLEVERLINE • SUBMERSIBLE PUMPS

**CLEVERLINE** – The new dirt water & sewage pumps from AURAS offer both convenience and excellent performance, and they provide an extreme versatility.

#### **RV 24 / RV 28**

The sewage pumps of the RV series are light, easy to handle and equipped with a high-quality vortex impeller made of cast iron allowing for wastewaters with contents of fibers and solids to be easily drained. High-quality materials and a solid construction ensure a long service life

#### **ILB 24 / IL 24 / IL 27**

The dirty water pumps of the IL series are compact and light, but nevertheless powerful and robust. The ILB 24, for instance, can be used to drain water up to a water level of 2 mm – ideal for flat surfaces such as basements, parking garages, pools etc. The maintenance of the pumps is really easy. An intelligent solution for a variety of applications.

#### **CY 10**


Equipped with two hose connection adaptors, this small robust pump offers a cost-efficient solution for many submersible pump applications with clear water – at a pumping capacity of up to 70 l/min. This pump is also available with a float switch.

Areas of application include: pools, garden ponds, flat roofs, basements, water reservoirs and many more.





	<b>CY 10</b>	<b>ILB 24</b>	<b>IL 24</b>	<b>IL 27</b>	<b>RV 24</b>	<b>RV 28</b>
Medium to be pumped	Clear water	Dirty water	Dirty water	Dirty water	Sewage	Sewage
Maximum discharge flow	4,2 m³/h	15 m³/h	15 m³/h	19 m³/h	15 m³/h	21 m³/h
Maximum discharge head	6 m	11 m	11 m	15 m	8 m	12 m
Maximum immersion depth	20 m	20 m	20 m	20 m	20 m	20 m
Maximum Temperature of to medium be pumped	40° C	40° C	40° C	40° C	40° C	40° C
pH-value	pH 5 - pH 8	pH 5 - pH 8	pH 5 - pH 8	pH 5 - pH 8	pH 5 - pH 8	pH 5 - pH 8
Hole-Ø of strainer	6 mm	2 mm	5,5 mm	7 mm	32 mm	37 mm
Weight	3,2 kg	10,5 kg	10,5 kg	12,5 kg	13,5kg	19,5 kg
Diameter	158 mm	215 mm	205 mm	205 mm	243 mm	243 mm
Height	273 mm	304 mm	303 mm	343 mm	395 mm	473 mm
Hose connections	25 mm / 1"	1" oder 2"	2"	2"	2"	2"
Impeller	Thermoplastic	Semi-Vortex PU	Semi-Vortex PU	Semi-Vortex PU	Vortex cast iron	Vortex cast iron
Nominal voltage	1 Phase, 230 V	1 Phase, 230 V	1 Phase, 230 V	1 Phase, 230 V	1 Phase, 230 V	1 Phase, 230 V
Frequency	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz	50 Hz
Motor power rating	0,15 kW	0,4 kW	0,4 kW	0,75 kW	0,4 kW	0,75 kW
Motor	Class F with motor protection	Class F with motor protection	Class F with motor protection	Class F with motor protection	Class F with motor protection	Class F with motor protection
Cable	H07RNF 10 m	H07RNF 10 m	H07RNF 10 m	H07RNF 10 m	H07RNF 10 m	H07RNF 10 m
Item No. without float	AP60.10.CY.100	AP60.10.IL.B24	AP60.10.IL.240	AP60.10.IL.270	AP60.10.RV.240	AP60.10.RV.280
Item No. with float *	AP60.10.CY.10A	–	AP60.10.IL.24A	AP60.10.IL.27A	AP60.10.RV.24A	AP60.10.RV.28A
<b>List price in € plus VAT</b>	<b>147,- / 159,-*</b>	<b>439,- / –</b>	<b>403,- / 425,-*</b>	<b>470,- / 493,-*</b>	<b>528,- / 552,-*</b>	<b>669,- / 692,-*</b>

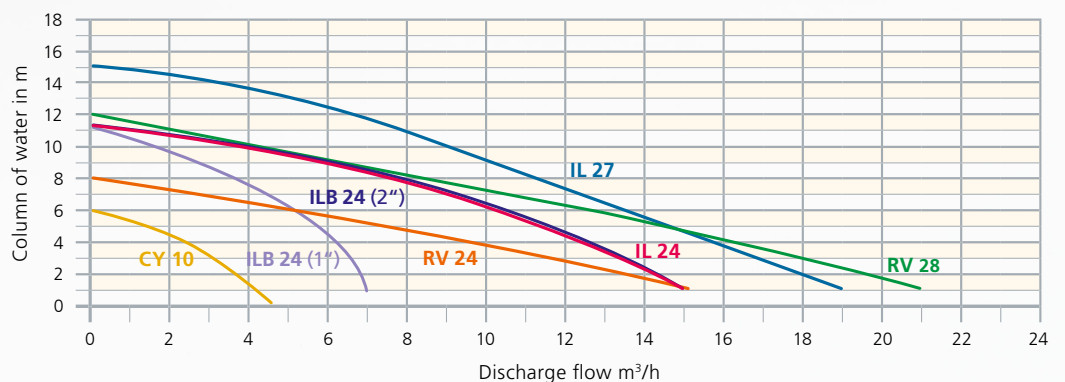

**AURAS** Pumpen GmbH & Co. KG

Borsigallee 14  
60388 Frankfurt am Main  
Germany

T +49 [0]69 678 307 190  
F +49 [0]69 678 307 199

info@auras-pumps.com  
www.auras-pumps.com

**AURAS**